

10-26-00

A

10/24/00
JC952 U.S. PTOPlease type a plus sign (+) inside this box → ☒Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. B 1.53(b))	Attorney Docket No.	13023(B)
	First Inventor or Application Identifier	WATLER, T.
	Title	SECURE INTERLINK RECEIVER FOR PROGRAMMING OF WIRELESS TELEPHONES
	Express Mail Label No.	EK687096010US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 25] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 12]	ACCOMPANYING APPLICATION PARTS
4. Oath or Declaration [Total Pages 3] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. B 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. BB 1.63(d)(2) and 1.33(b).	7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. B 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. B 1.28).	8. <input type="checkbox"/> 37 C.F.R.B3.73(b) Statement (when there is an assignee) <input checked="" type="checkbox"/> Power of Attorney
	9. <input type="checkbox"/> English Translation Document (if applicable)
	10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations
	11. <input type="checkbox"/> Preliminary Amendment
	12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
	13. <input checked="" type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
	14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
	15. <input type="checkbox"/> Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No: **08 / 968,329**
Prior application information: Examiner **MAUNG, N.** Group / Art Unit: **2744**

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	RICHARD ESTY PETERSON				
	Patent Attorney				
Address	1905-D Palmetto Avenue				
City	Pacifica	State	CA	Zip Code	94044
Country	United States	Telephone	(650) 557-5708	Fax	(650) 557-5716

Name (Print/Type)	Richard Esty Peterson	Registration No. (Attorney/Agent)	26,495
Signature	<i>Richard Esty Peterson</i>	Date	10/24/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL
for FY 2000**

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.

See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$ 355.00)**Complete if Known**

Application Number	
Filing Date	
First Named Inventor	WATLER, THEODORE W.
Examiner Name	
Group / Art Unit	
Attorney Docket No.	13023(B)

METHOD OF PAYMENT (check one)

- 1.
- ☐
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number Deposit Account Name ☐ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

- 2.
- ☒
- Payment Enclosed:**
-
- ☒
- Check
- ☐
- Money Order
- ☐
- Other

FEE CALCULATION**1. BASIC FILING FEE**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	355.00
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 355.00)**2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid
Independent Claims	-20** = <input type="text"/>	X <input type="text"/>	<input type="text"/>
Multiple Dependent Claims	-3** = <input type="text"/>	X <input type="text"/>	<input type="text"/>

**or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$)**FEE CALCULATION** (continued)**3. ADDITIONAL FEES**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) Other fee (specify)

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**SUBMITTED BY**

Name (Print/Type)	Richard Esty Peterson	Registration No. (Attorney/Agent)	26,495	Telephone	(650) 557-8708
Signature		Date	10/24/00		

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR

PAGE 2 OF 2

Docket Number (Optional)

13023(B)

Applicant, Patentee, or Identifier: WATLER, THEODORE W., ET AL

Application or Patent No.: _____

Filed or Issued: _____

Title: SECURE INTERLINK RECEIVER FOR REMOTE
PROGRAMMING OF WIRELESS TELEPHONES

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.
☒ Each such person, concern, or organization is listed below.

TELEMAC CORPORATION

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Christopher M. McGregor

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

Signature of inventor

Signature of inventor

Signature of inventor

Date

Date

Date

ADDITIONAL INVENTOR LISTED ON PAGE 2 ATTACHED

10/24/00
09/696720

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
13023(B)

Applicant, Patentee, or Identifier: WATLER, THEODORE W., ET AL

Application or Patent No.: _____

Filed or Issued: _____

Title: SECURE INTERLINK RECEIVER FOR REMOTE PROGRAMMING
OF WIRELESS TELEPHONES

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN TELEMAC CORPORATION

ADDRESS OF SMALL BUSINESS CONCERN 6701 Center Drive West, Suite 700
Los Angeles, CA 90045

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☐ no such person, concern, or organization exists.
☒ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING TRAVIS MELCHIN MCGREGOR

TITLE OF PERSON IF OTHER THAN OWNER Vice President, Business Development

ADDRESS OF PERSON SIGNING 2704 Manhattan Avenue, Manhattan Beach, CA 90266

SIGNATURE _____ DATE _____

PATENT

WATLER, THEODORE W.

* * * * *

SPECIFICATION AND CLAIMS

* * * * *

FOR

* * *

LETTERS PATENT

* * * * *

FOR

* * *

**SECURE INTERLINK RECEIVER FOR REMOTE
PROGRAMMING OF WIRELESS TELEPHONES**

* * * * *

**RICHARD ESTY PETERSON
PATENT ATTORNEY
1905-D Palmetto Avenue
Pacifica, CA 94044**

13023(B) - C.I.P.

**SECURE INTERLINK RECEIVER FOR REMOTE
PROGRAMMING OF WIRELESS TELEPHONES**

BACKGROUND OF THE INVENTION

This is a continuation-in-part application of Application Serial No. 08/968,329, filed November 12, 1997 now U.S. Patent No. 6,138,004, issued on October 24, 2000, which is a continuation of Application Serial No. 08/521,966, filed August 31, 1995, now abandoned.

This invention relates to a secure interlink receiver for programming wireless telephones wherein the interlink receiver interconnects a wireless telephone with a remote central processor for secure assignment of the necessary phone number and parameters for immediate use of the telephone by a customer with a designated service provider.

The use of an interlink receiver for programming a telephone was first taught in McGregor, et al, U.S. Patent No. 5,325,418, entitled, "Cellular Phone Accounting System", issued June 28, 1995. In that patent, phones received from different manufacturers are programmed for use in a controlled environment. For example, in the situation where phones are programmed and activated for governmental use or organizational use in private companies, strict control over the programming procedure is maintained. Similarly, in the rental environment, the phones are programmed and tracked by the organization renting the phones enabling close operational control over the temporary use of the phone by a rental customer.

Although it was suggested that the procedures for programming, tracking and accounting described in the referenced patent could be incorporated into

central telephone systems, questions of security as well as inertia were predicted to inhibit broad application.

Additionally, where gang programming of multiple phones by manufacturers or service providers occurs, security can be controlled. A system for programming cellular phones in an interlink receiver with a gang platform is described in the continuation-in-part application of McGregor, et al, entitled, "Mobile Phone with Internal Call Accounting Controls", now U.S. Patent No. 5,625,669, issued April 29, 1997.

The significant problem of phone security is evident by the massive losses of carriers and service providers. The dramatic increase in wireless communication in the form of cellular telephone systems, cordless personal communication service devices, radio phones and other digital and analog systems that communicate over the airwaves has magnified the vulnerability to fraud. Frequency scanners and other interception devices have allowed access not only to the content of communications, but to the electronic serial numbers and access codes of the callers. Clone phones, that imitate a legitimate subscriber's phone, are fraudulently programmed to duplicate the codes of the legitimate phone and enable the user of the cloned phone to place calls that are billed to the authorized subscriber. Losses to wireless phone fraud are estimated to be in the hundreds of millions of dollars per year.

As wireless phone distribution moves from the controlled environment of carriers and local service providers to general retailers, the programming and activation of wireless phones is accomplished remotely. Frequently, several entities may be involved behind the transfer of a wireless phone from the retailer

to the user. The retailer will likely sell wireless phones from different manufacturers, and offer assignment of the phone to different service providers. The retailer may have available different credit or debit plans for payment of the phone and carrying or underwriting the service provider charges, enabling a new market for intermediaries.

The availability of many of these options is described in the patent of McGregor, et al, U.S. Patent No. 5,577,100, entitled, "Mobil Phone with Internal Accounting" issued November 19, 1996. In that patent, convenient methods of remote programming and phone activation are described, including methods that can be accomplished over the airways. With the advent of this prospect, the question of the security of the programming procedure becomes critical.

It is a primary object of this invention to resolve the problems of secure programming and activation of wireless phones where all or part of the programming originates from a host computer at a site remote from the phone being programmed. While the description of the invention is primarily directed to the use of the more secure line connection between the interlink receiver and the host computer to minimize unauthorized intrusion, the interlink receiver system is designed to communicate in encrypted messages to enable the dialog for remote programming to be accomplished via a wireless communication path. In certain areas of the world, the existing hardwire infrastructure is nonexistent or unreliable. Remote programming and activation over the airways is therefore a necessity.

The object of this invention is to provide a device and process that maximizes the ability to remotely program a wireless phone in a secure manner.

SUMMARY OF THE INVENTION

This invention relates to a device and process for secure remote programming of wireless phones.

Programming of phones from a remote host computer may be required for a number of reasons. In U.S. Patent No. 5,325,418, a system for remotely programming wireless phones was described for the primary purpose of central accounting. Programming of cellular telephones in the rental environment includes initial programming and activation of new phones added to the rental inventory, and the reprogramming of rental phones that are returned to different rented sites and added to the return site inventory.

In other situations, programming of wireless phones from a remote host is desired to coordinate the allocation of assignable phone numbers. For example, the service provider may have a block of MIN's (mobile identification numbers) that must be assigned to new phones before they can be activated. If there is a number of distribution outlets, centralizing this resource allows assignment to be made in accordance with inventory movement at each site.

As programming and activation of the mobile phone moves away from the control of the manufacturer, carrier or service provider, security becomes more difficult to implement. It has been suggested that remote programming can be performed with a conventional personal computer and a modem with the wireless phone directly connected to the serial port of the computer via a cable. Because a personal computer is effectively an open system, security is virtually impossible to implement, where security is to extend to the programmer. However, where there is interposed an interlink receiver between the host computer and the

telephone unit as disclosed in the referenced patent, hardware and software can be implemented that effectively codes certain features of the programming sequence that is even secure from the technician programming the phone.

The interlink receiver of this invention is designed to include a secure encoding and encryption chip that permits certain security codes to be entered into a mobile phone without access by the programmer and without certain keys entering the communication dialogue between the host computer and the interlink receiver.

The interlink receiver of this invention is designed with an internal modem to allow the interlink receiver to directly connect to a phone line terminal for station to station connection with a remote host computer. The interlink receiver includes a small microprocessor and updatable memory to perform the procedural tasks of communicating with the host computer and the installed phone unit, and allowing data entry via a small keyboard and feedback with the technician, via a small display.

The secure interlink receiver has its own identification number and includes an internal routine for encrypting communications with the host computer. The interlink receiver is designed to enter a secret authentication key into the phone unit in a tamper-proof manner enabling the phone unit to generate shared secret data with the carrier or system provider. The authentication key or A-key is a 64 bit code assigned to the permanent security and identification memory of the mobile phone unit. The assigned code is known only to the home location register or authentication center, and does not change as the mobile unit roams from one zone to another. As detailed in the TIA/EIA Interim Standard 91

(IS-91), the necessary caller authorization codes and communication encryption codes are generated using in part the A-key. In this manner, each mobile phone unit has a unique key from which changing authentication and encryption codes can be derived. Enabling authentication codes and encryption codes to change for a discrete mobile phone unit greatly enhances the security of the unit. Additional procedures and protocols for secure call placement can be added, including random or calculated change of authentication codes and encryption codes.

The interlink receiver of this invention is designed to be an inexpensive, but secure device that can be used to remotely program and encode a mobile phone unit by a technician or a common sales person. The device is designed for use in a system with a host computer and includes the necessary terminal for interconnection with programmable mobile phone units of different manufacture.

These and other features will be apparent from a consideration of the detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of the interlink receiver system with a host computer, an interlink receiver unit and a terminal, with a phone unit connected to the terminal.

Fig. 2A is a diagrammatic view of the first part of a flow chart for encoding a phone unit.

Fig. 2B is a diagrammatic view of the last part of the flow chart of Fig. 2A.

Fig. 2C is a diagrammatic view of a flow chart for a sub-routine for the flow chart of Figs. 2A and 2B.

Fig. 3A is a first segment of a circuit diagram of the internal circuitry of the interlink receiver unit shown in Fig. 1.

Fig. 3B is a second segment of the circuit diagram of Fig. 3A.

Fig. 3C is a third segment of the circuit diagram of Fig. 3A.

Fig. 3D is a fourth segment of the circuit diagram of Fig. 3A.

Fig. 3E is a fifth segment of the circuit diagram of Fig. 3A.

Fig. 3F is a sixth segment of the circuit diagram of Fig. 3A.

Fig. 3G is a seventh segment of the circuit diagram of Fig. 3A.

Fig. 4 is an alternate embodiment of the interlink receiver unit with a connected phone unit, the phone unit also shown in part, in phantom, detached from the interlink receiver unit.

Fig. 5A is a front perspective view of an alternate embodiment of the interlink receiver unit with a phone unit.

Fig. 5B is a back perspective view of the interlink receiver unit electronically connected to the phone unit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Fig. 1, the interlink receiver system is shown, and designated generally by the reference numeral 10. The system 10 includes a remote host computer 12, an interlink receiver unit 14 and an interconnection terminal 16. In operation, the interlink receiver system 10 connects to a programmable mobile phone unit 18, shown connected to the interconnection terminal 16 of the interlink receiver unit 14.

The host computer 12 is any type of computer or computer system server having at least the power of a conventional personal computer. In the example shown, the host computer 12 has a monitor 20, a keyboard 22 and a central processing unit 24. The host computer 12 includes a conventional internal modem 23 in the central processing unit 24, with a phone cord 25 and a terminal connector 26 connected to a conventional phone line 27.

Similarly, the interlink receiver unit 14 has an internal microprocessor and modem (not visible) with a phone cord 30 having a terminal connector 32 that connects to a conventional switched telephone line 34. During operation, the interlink receiver unit 14 is connected via modem to the host computer 12 through common carrier telephone lines. The interlink receiver unit 14 is fabricated with

a secure housing 36, a touch-pad keyboard 38 and a small back-lit, LCD display screen 40.

In Fig. 1, the interlink receiver unit 14 is shown connected to the mobile phone unit 32, here a typical cellular telephone 42. The keyboard 38 and display screen 40 of the interlink receiver unit 14 are sufficient to display alpha-numeric characters 44, enabling brief messages and codes to be conveyed to the party programming the phone unit 42. The interlink receiver unit 14 is designed to carry on a dialogue and data exchange with the host computer via modem and the technician or party programming the phone unit 42 via the display screen 40 and keyboard 38. The interlink receiver unit 14 communicates with the mobile phone unit 18 in the Fig. 1 embodiment via a cable 41 connected to a 25 pin DB-25 data port (not visible) at the back of the interlink receiver unit 14 and to the interconnection terminal 16 compatible with the mobile phone unit being programmed. Substitute cables having an interconnection terminal compatible with each manufacturer's phone unit are provided for programming phone units from different manufacturers. The interlink receiver unit 12 has a conventional power socket (not visible) for a power transformer cord unit 46 that connects to a customary power source for powering the interlink receiver unit 14 and a connected phone unit 18 at low d.c. voltage when power switch 48 is turned on. The interlink receiver unit 14 includes its own code kernal identical or similar to the A-key for authentication of the individual interlink receiver unit and for encrypted communication with the host computer.

The interlink receiver unit 14 is designed for operation at different levels of security, depending on the requirements of the organization programming the

phone units. The following sequence of operation is designed to provide moderate security. Implementation of the higher levels of security will be discussed in conjunction with the circuit diagram of Fig. 3 and the alternate embodiments of Figs. 4, 5A and 5B.

Referring now to Fig. 2A, a portion of a flow chart depicting the mode of operation of the interlink receiver system 10 is shown. The host computer 12 has a computer program for controlling their encoding operation with the interlink receiver unit 14. The interlink receiver unit has at least an input and output electronics operable with a small microprocessor for exchanging data with the host computer and executing the encoding commands of the host computer 12. In the alternate embodiment of Fig. 4, the interlink receiver unit includes a computer program for programming and encoding a connected wireless phone unit under a reduced command set from the host computer 12.

From an initial start box 50, the interlink receiver unit 14 is turned on with power switch 48 and the unit is powered up in sequence box 52. The sequence from power up box 52 proceeds to a sleep mode at box 54 where the interlink receiver unit 14 awaits activity in the form of any key press to prompt the device into activity. When prompted, the device proceeds to decision diamond 56. If the phone unit 18 is not electronically connected via the data bus cable 41 to the receiver unit 14, the display screen is prompted at box 55 to display "PHONE CONNECTED?". The sequence proceeds to decision diamond 57, where a "TIME OUT?" prompt is displayed. If the response is yes, the sequence moves to restart box 59 which loops to initiation box 69. If no, the sequence proceeds to decision diamond 61 to determine if a phone unit is not connected. If yes, the sequence

proceeds to diamond 58. If no, the sequence loops back to diamond 57. If the receiver unit is connected, the system proceeds to obtain the access code of the user of the interlink receiver unit 14 before proceeding. The procedure requires that a user authorization code be entered via the keyboard to insure that only authorized personnel are using the interlink receiver unit 14. When the correct access code is entered, the interlink receiver unit 14 dials the host computer 12 at diamond 60. When an invalid access code is entered, the LCD displays, "INVALID ENTRY" at box 62 and proceeds to a pause at box 64 allowing reentry of a proper access code before shut down at box 66 that loops to restart box 69 for re-initiation of the procedure. If after dialing at diamond box 60 with the prompt "DIALING" displayed, no connection is made, the display screen displays "NO RESPONSE" at box 68, pauses at box 70 and initiates a restart at box 72 that loops back to re-initiation box 69. If the dialing is successful and a connect is made, the interlink receiver unit 14 displays "PROCESSING" at box 74 and proceeds to the connect box 76 in Fig. 2B.

From the processing box 74 after connection of the interlink receiver unit 14 with the host computer 12, the interlink receiver unit 14 communicates with the phone unit 32 to obtain the access codes from the interlink receiver unit 14 and the phone data from the phone unit 18 in diamond 77. The access authentication subroutine is discussed with relation to Fig. 2C hereinafter.

If the phone unit 12 responds with inadequate data, the dialogue box 78 inquires whether the phone unit is to be programmed and this message is displayed in the display screen 40. Ordinarily, the phone unit has been preprogrammed with at least the electronic serial number (ESN) and only the

mobile identification number, and in certain instances the site identification number (SID) needs to be added to the phone unit. This is handled in a sub-routine box 80 where the number assignment module (NAM) is activated and the phone unit 18 is programmed by the host computer 12 or by the interlink receiver unit as discussed with relation to Fig. 4. The programming is accomplished in the same manner as described in the reference specifications. If the response is "NO", then the decision diamond 78 leads to the restart box 82 which disconnects the communication line with the host computer and loops to initiation box 69. If the phone unit 42 has both an ESN and a MIN. initially or after programming, the phone data, including at least the ESN and MIN, is sent to the host computer at box 84. The host computer returns the A-key and checks the communication circuit at diamond 86. It is to be understood that the A-key transmitted is transmitted in encrypted form, or , alternately as described hereinafter is a coded command to the interlink receiver as described with reference to Fig. 4 to generate the A-key from secret data shared by the host computer and by the interlink receiver on fabrication or servicing.

If there is a problem with the connection, the display screen 40 reads "NO RESPONSE", and after a pause the interlink receiver unit sequences to restart at box 90 which loops to box 69. If there is no problem with the connection, the process proceeds to displaying "PROCESSING" at box 92 as the code for the A-key or for generating the A-key is transferred to the security module in the phone 18. It is to be understood that certain phone manufactures will prefer to internally generate the A-key from an encryption chip or circuit within the phone unit. In these instances, the activation command together with any code data is passed to

the phone unit 18 for internal generation of the A-key.

During the procedure of processing, the display message "PROCESSING" at box 94 is displayed. Once the A-key is programmed into the phone, the interlink receiver unit 14 displays the message "A-KEY PROGRAMMED" at box 98. Unless further tasks need to be accomplished, the system pauses at box 100 and enters restart mode at box 102 that loops the sequence back to box 69.

When the interlink receiver 14 connects to the host computer 12 at box 76, the sub-routine at box 104 is simultaneously initiated to authenticate both the interlink receiver unit 12 and the user. Referring to Fig. 2C, the sub-routine 104 includes a command to get access code at box 106 that prompts the interlink receiver unit 14 to display "ACCESS CODE?" at box 108 and awaits entry of the access code at diamond 110. As the user enters his or her access code, the numbers are added to a buffer 112 and the display screen is prompted to display a series of stars until the routine loops through enough entries to fill the buffer indicated at diamond 116 whereupon the access code number is compared to a stored number and access is granted or denied at decision tree 118. The same sub-routine is followed at decision diamond 58. Concurrently at box 106, the authentication code for the interlink receiver unit 12 is automatically transferred in encrypted form to the host computer to authenticate that a legitimate interlink receiver unit 12 is being connected to the host computer for exchange of coded data.

Referring now to Fig. 3, the minimum circuitry required for operating the interlink receiver unit 12 is shown in diagrammatic form. A small microprocessor 130 controls the operations within the interlink receiver unit 14

and connects to a latch chip 132 and a Duart dual serial port chip 134 for connection to the internal modem 136 and the phone unit 18. The microprocessor chip 130 is also connected to the keypad 138 via selector 140 and to LCD 142. The circuit includes the necessary power circuit 144 and clock circuit 146 and 148 for coordinating operations for both the connected mobile phone unit 18 and modem 136 that connects the interlink receiver unit 14 to the host computer 12. In this configuration, the interlink receiver operates as a controller and allows most of the programming functions to be initiated by the host computer 12 in communication with the phone unit 18.

Referring now to Fig. 4, an alternate embodiment of the interlink receiver unit is shown. The interlink receiver unit is designated generally by the reference numeral 160 and is constructed in a similar manner to that shown in Fig. 1. A housing 162 includes a keyboard 164 and an LCD 166. A wireless phone unit 168 is coupled to an adaptor connector 170 for connecting the data port of the phone unit with the standard 25 pin receptacle (not visible) of the interlink receiver unit 16 which is mounted at the bottom of a well 172. This eliminates a cable connection between interlink receiver 160 and the phone unit 168 for added security. By this direct connection, which can be shielded in the well 172, interception of the communication between the interlink receiver and the phone unit is minimized. Additionally, impedance sensitive detection circuitry and protective measures can be taken in the circuitry of the interlink receiver unit 160 or in the routing circuitry of the adapter connector 170, to maximize security. The adaptor connector 170 is constructed in a variety of configurations to couple the unique programming terminal of a particular phone unit with the pin receptacle of the

interlink receiver unit.

The interlink receiver 160 is designed as an independent unit and includes its own internal battery power pack 174 that slides in adjacent the power switch 176 on the side of the housing 162. Internally, the interlink receiver unit 160 is similar to the unit of Fig. 1 with the addition of a replaceable read only memory 178 and a random access memory 180 connected to the microprocessor 130. The microprocessor 130 is required to be slightly more powerful than used for the interlink receiver unit 14 of Fig. 1 to handle the programming and memory functions described, and may be similar to the microprocessors used in programmable phone units. The random access memory 180 stores the necessary programming for programming phones and operationally assigning the A-key to the phone unit when prompted by the host computer. The read only memory 178 is in the form of a sealed, replaceable chip that stores a series of A-keys or part of the code necessary to generate the keys.

With the phone unit 168 plugged into the interlink receiver unit, the interlink receiver unit can activate the phone unit 18 using the ESN and communicate with the carrier through the radio electronics of the phone unit. The host computer 12 connects to a wireless communication service provider to communicate with the interlink receiver unit 160 over the airways. Although messages can be encrypted as described with relation to the embodiment of Fig. 1, it is common knowledge that the transmitted data can be intercepted and analyzed for cracking of encoded messages. The use of a destructible and replaceable ROM chip 178 enables data codes known to the host computer to be directly stored in inalterable form in the interlink receiver unit 160. This enables

communications between the interlink receiver unit 160 via the mobile phone unit 168 to be accomplished in reduced instruction sets that are indecipherable, although widely distributed over the airways. For example, using simple coded command sets the host computer 12 can command the activation of programming of the security codes for the phone unit 18, using the programming software residing in the RAM 180 and codes residing in the ROM 178. The A-key can be coded into the phone unit using commands from the host computer 12 together with a completion piece of the A-key from the host computer 12 that is coupled with an indexed piece of the A-key stored in the ROM of the interlink receiver unit 160. In this manner, the host computer 12 never transmits more than a part of the data code for the A-key to the interlink receiver unit 160, and the interlink receiver unit never has more than a part of the data code for the A-key, unless actively entering the combined pieces of the completed A-key. As only the host computer 12 knows the entire code, loss of the interlink receiver unit 160 will not jeopardize the security of the data exchange or result in a loss of a series of A-keys. Exhausting the available data codes available for generating A-keys will require the interlink receiver unit to be returned to an authorized service center for replacement of the secure ROM chip with a new chip. Alternately, the ROM chip may include an algorithm for generating an A-key known to the host computer under command from the host computer 12. In each case, insufficient data is exchanged between the host computer 12 and the interlink receiver unit 160 to derive the A-key, even if the communications are deciphered.

It is therefore apparent that while greater control over security may be apparent in systems that communicate via hardwire, there are certain regions

where there is no infrastructure to enable phone programming and encoding to be accomplished remotely except through airway communications. In such situations, so long as the carrier has reasonable control over the use of the interlink receiver, programming, encoding and activation of the phones remotely over the airways can be accomplished expeditiously and securely.

By removing the programming and number assignment functions from a personal computer and installing them in dedicated hardware, opportunity for user intrusion is minimized by restricting the data to which the user has access. Additionally, the use of dedicated hardware enables security measures to be implemented in the hardware and circuitry of the dedicated hardware which would be impossible to implement in the open architecture of a personal computer. The interlink receiver unit is effectively designed as a tamper-proof unit that requires the cooperation of the host computer to unlock the data used for programming and encoding phone units. Additionally, while code data in the interlink receiver is secret shared data with the host computer, the host computer is not obliged to share its secret data with the interlink receiver except on an item by item basis when encoding a particular phone unit. The host computer 12 can therefore maintain its security independent of the loss or compromise of the security of the interlink receiver unit.

In the embodiment of the interlink receiver system 10 of Fig. 4, the receiver unit 160 is interconnected to the phone unit 168 by the phone unit being plugged into the interlink receiver unit 160. It is to be understood that an equivalent interconnection is accomplished by plugging the interlink receiver unit into a phone unit.

Referring now to Figs. 5A and 5B, an alternate embodiment of the interlink receiver system 10 is shown with a mobile phone unit 180 and an interlink receiver unit 182. The interlink receiver unit 182 is plugged into the mobile phone unit 180, as shown in Fig. 5B. The mobile phone unit 180 is in the form of a typical state-of-the-art telecommunication handset with a keypad 184, control keys, 186 and a display 188. The handset 180 has an antenna 190 and is capable of communication with the host computer 12 over the airways using the radio electronics of the phone unit as described with reference to the interlink receiver system of Fig. 4.

The interlink receiver unit 182 is in the form of a programmed smart card 192 having a series of electrical contacts 194 that engage a series of compatible terminal contacts (not shown) in the phone unit 180. For example, in a wireless phone system under GSM specifications, the smart card or SIM (Subscriber Identification Module) card 192 includes an internal microprocessor, ROM, EEPROM and RAM (not visible). The microprocessor, secure ROM and RAM are the functional equivalent of the microprocessor 130, read only memory 178 and random access memory 180 of the previously described units. It is to be noted that the EEPROM in a standard SIM card simply adds a non-volatile memory that functions like a RAM, but holds code and data when the SIM card is disconnected from an external power source such as the phone unit 180.

As shown in Fig. 5B, the interlink receiver unit 182 is plugged into the phone unit 180 by removing the battery pack 196 and seating the SIM card 192 in the handset with the electrical contacts 194 of the SIM card 192 in contact with the terminal contacts (not visible) of the phone unit 180. When the battery pack 196 is

replaced, the electrical interconnection provides a direct communication pathway between the interlink receiver unit 182 and the phone unit 180, and between the coupled interlink receiver unit 182/phone unit 180 and the host computer 12 via the radio electronics of the phone unit 180. The SIM card 192 complies with ISO 7816 parts 1 and 2. The phone unit, in addition to being designed for use in a GSM wireless communication system, complies with hardware specifications in ISO 7816 part 3 to interconnect with the SIM card 192 and with a communication protocol in ISO 7816 part 4 to exchange data and code commands with the SIM card 192.

With the communication of the interlink receiver unit and host computer 12 being via the radio electronics of the phone unit, as in the Fig. 4 embodiment, the modem is unnecessary, particularly when the interlink receiver unit remains coupled to the handset during use. However, in many circumstances, the inclusion of a modem in the smart card is beneficial for encoding over telephone lines, particularly when the interlink receiver unit is preprogrammed for programming multiple phone units and is used by a technician and not simply by a party user of the phone unit in a coupled state.

Additionally, it is to be understood that other interface standards and configurations are equally applicable where a programmable smart card having a secure ROM (or separate chip or circuit) for a security code kernel is connectable to a wireless handset. For example, the interconnection of the smart card is alternately performed by installing the card through an end or side slot. The format of the card is alternately in the form of a flash card or minicard. Where the programming procedures are not automatic and require data or code

entry, the keypad 184 and display 188 of the phone unit 180 are employed by the technician or party using the phone unit input and prompts or feedback.

It is to be understood that the interlink receiver system using the format provided by a standardized smart card that is preprogrammed is the functional equivalent of the previously described alternatives of the interlink receiver system.

In the patent referenced, "Mobile Phone With Internal Accounting", U.S. Patent No. 5,577,100, there is described a handset-contained, prepaid accounting program for real-time call accounting. As noted, security of the programming procedure is critical. Such accounting program is containable in the smart card or shared by the smart card and the phone unit when coupled to effect secure communications and transactions with a host computer of the initial programming entity and/or the host computer of a subsequent service provider during use. This added layer of security enables secure remote programming of the smart card and/or programming and activation of the phone unit when coupled with the smart card.

As described with reference to the previously described embodiments, the smart card in one form is simply a secure, inexpensive carrier for application software of the type described in U.S. Patent No. 5,577,100 that is loaded on the smart card at a service center using the security of the card as an interlink receiver system where the programmed card is ultimately coupled to a phone unit. The tamper-proof, pre-existing code or coding kernel in the interlink receiver unit allows a means of positive identification and authentication of the interlink receiver unit and provides the necessary added layer of security for authorized exchange of data and code with the phone unit in the open

environment described in the Background of the Invention.

It is to be understood that as further advances in component miniaturization and standardized protocols evolve, other implementations of the secure interlink receiver system of this invention using the format of a smart card will become apparent.

While, in the foregoing, embodiment of the present invention have been set forth in considerable detail for the purposes of making a complete disclosure of the invention, it may be apparent to those of skill in the art that numerous changes may be made in such detail without departing from the spirit and principles of the invention.

CLAIMS

1. An interlink receiver system for encoding wireless phone units with security codes comprising:

a host computer;

an interlink receiver unit remote from the host computer having a communication system secure from a user of the interlink receiver system that communicates with the host computer, wherein the host computer has a communication system that is adapted to communicate with the interlink receiver unit, and a computer program for effecting the exchange of data between the host computer and the interlink receiver unit wherein the interlink receiver unit has a secure memory with a security code kernel that enables identification of the interlink receiver unit;

a communication pathway between the interlink receiver unit to a wireless phone unit connected to the interlink receiver unit; and,

authentication means in the interlink receiver unit that authenticates the interlink receiver unit using the stored authentication code of the interlink receiver unit before exchanging code or data with a connected wireless phone unit, and, cooperative authentication means in the host computer secure from a user of the interlink receiver unit for authenticating the interlink receiver unit and authorizing exchange of data or code between the host computer and the interlink receiver unit.

2. The interlink receiver system of claim 1 wherein the host computer has data in the form of security codes and program means for transferring data or code when the interlink receiver unit is in communication with the host computer.

3. The interlink receiver system of claim 1 wherein the interlink receiver unit is in the form of a smart card.

4. An interlink receiver unit for activating security codes in wireless phone units under control of a remote host computer, the interlink receiver unit comprising:

internal electronic control circuitry means contained within the interlink receiver unit and secure from a user of the interlink receiver unit for controlling the operation of the interlink receiver unit;

a protected memory in the internal electronic control circuitry means with stored security code data secure from a user of the interlink receiver unit wherein the stored security code data includes data to identify and authenticate the interlink receiver unit;

communication means operable by the control circuitry for exchanging data between the interlink receiver unit and the host computer;

communication means operable by the control circuitry for exchanging data between the interlink receiver unit and a wireless phone unit in communication with the interlink receiver unit after authentication of the interlink receiver unit by the host computer; and,

data transfer means for transferring activation commands to the wireless phone unit in communication with the interlink receiver unit on command by the host computer.

5. The interlink receiver unit of claim 4 wherein the interlink receiver unit is in the form of a smart card.

[illegible][illegible]

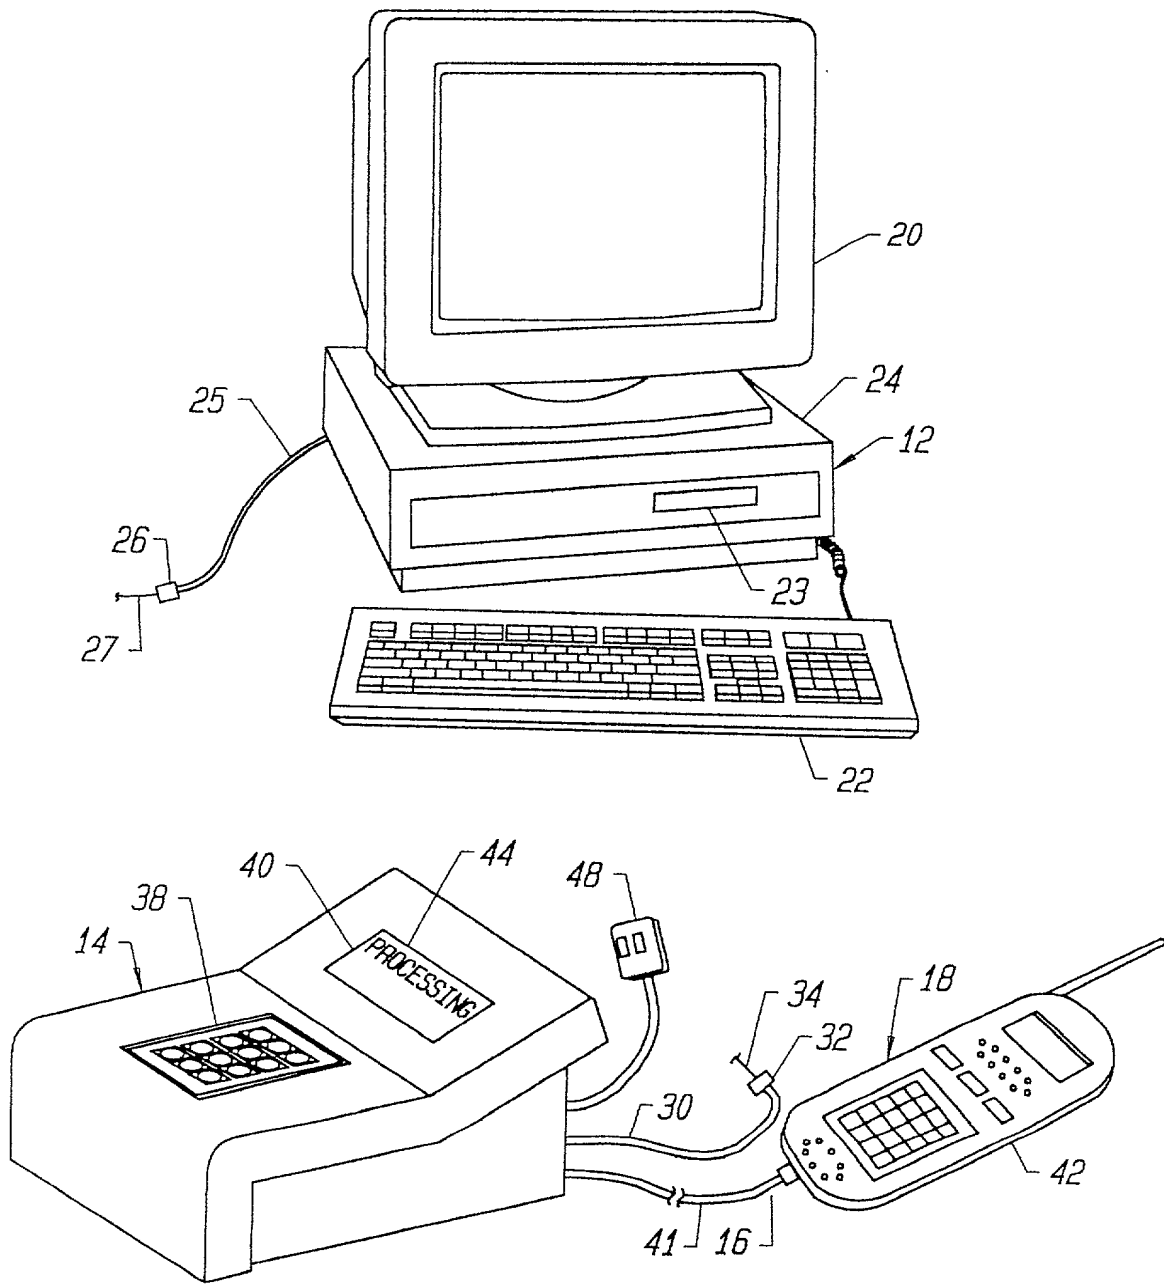


FIG. 1

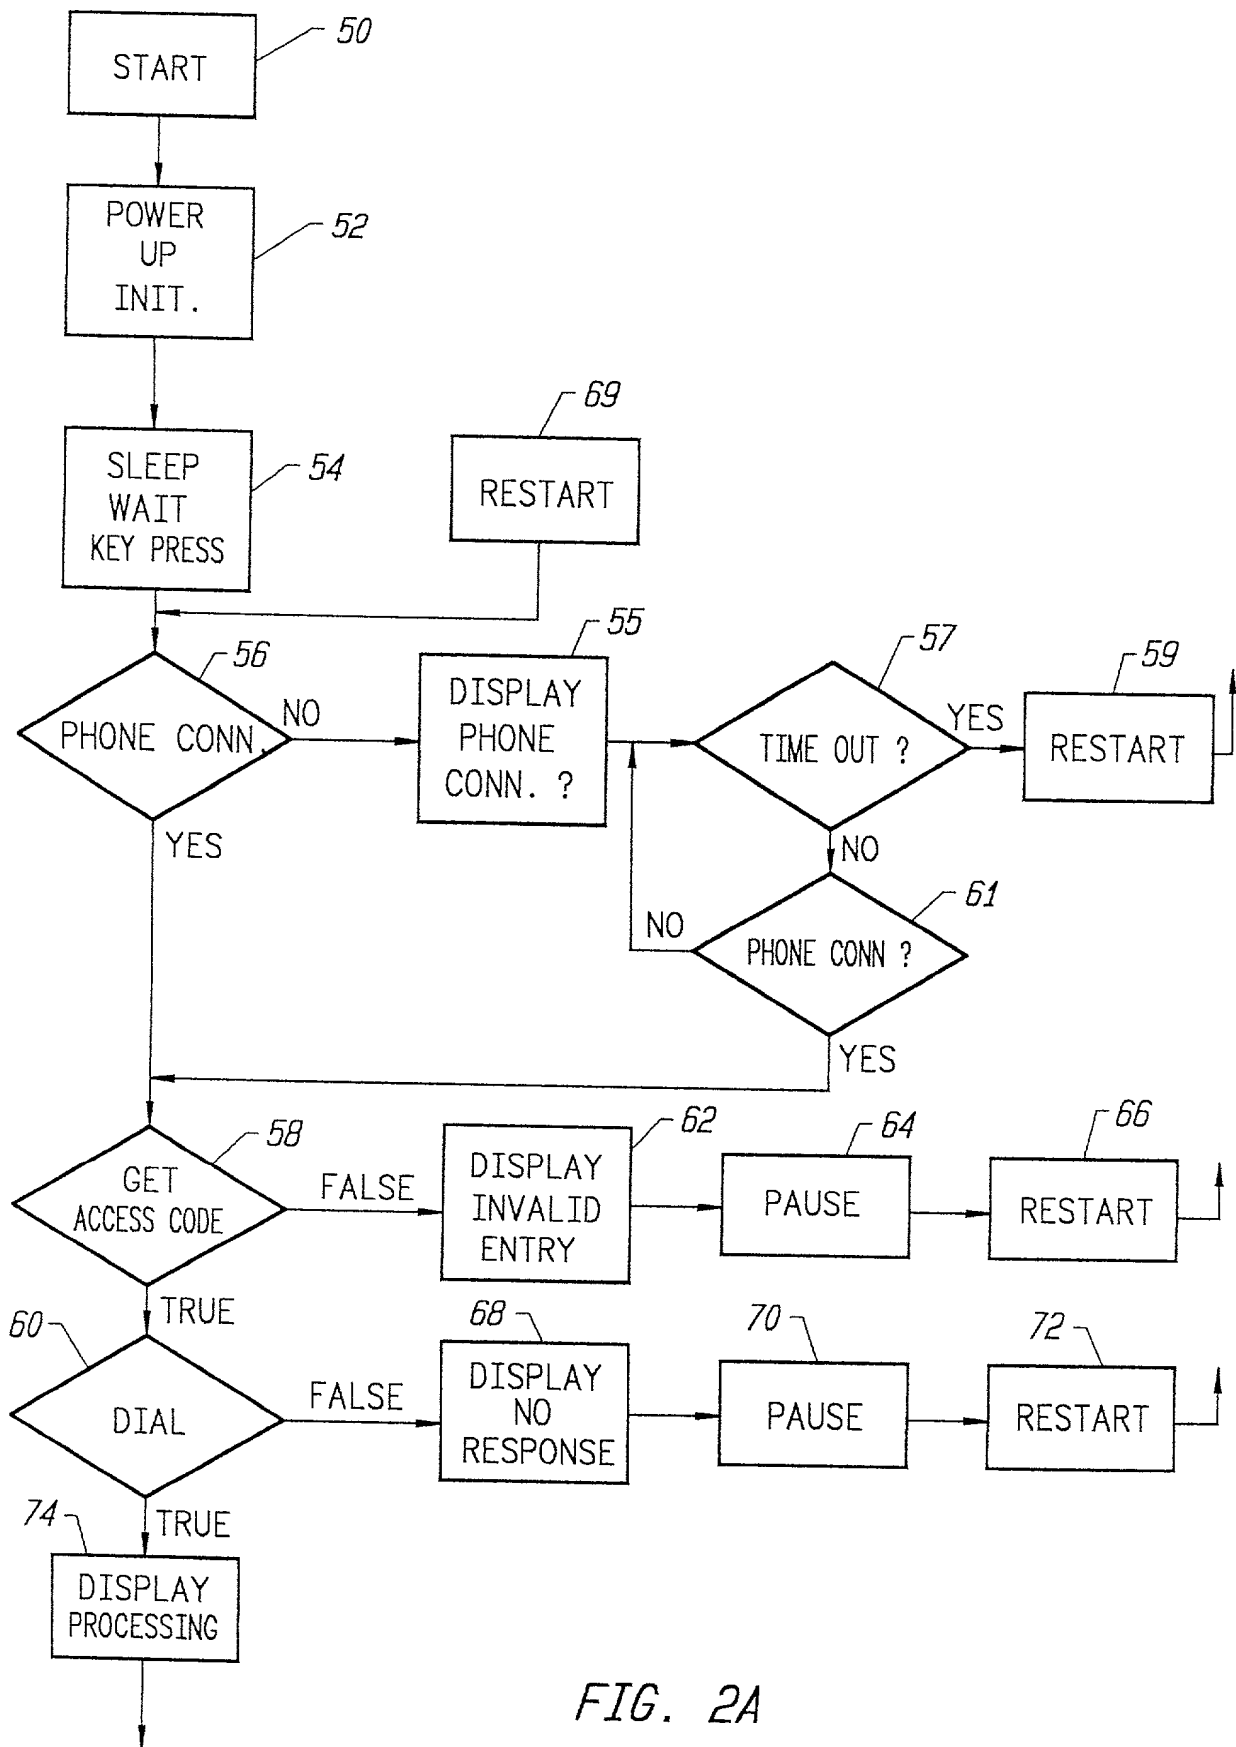


FIG. 2A

```

graph TD
    76[CONNECT] --> 104[SUBROUT.]
    104 --> 76
    76 --> 77{GET PHONE DATA}
    77 --> 78{PROG PHONE?}
    78 -- YES --> 80[PHONE PROG.]
    80 --> 76
    78 -- NO --> 82[PAUSE & RESTART]
    82 --> 77
    84[SEND PHONE DATA<br/>GET A-KEY]
    77 --> 84
    84 --> 77

```

FIG. 2B

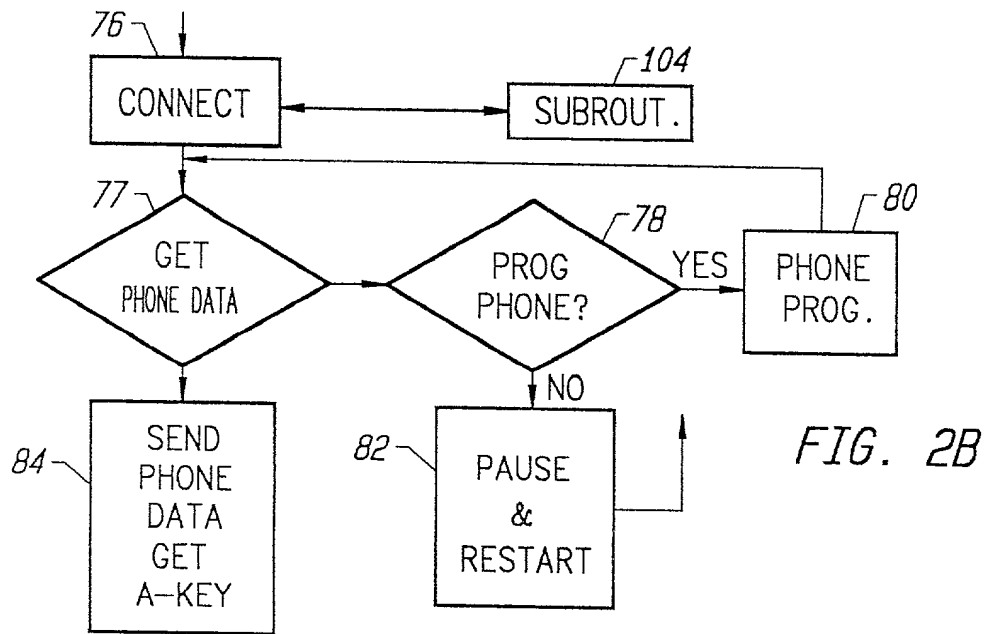


FIG. 2B

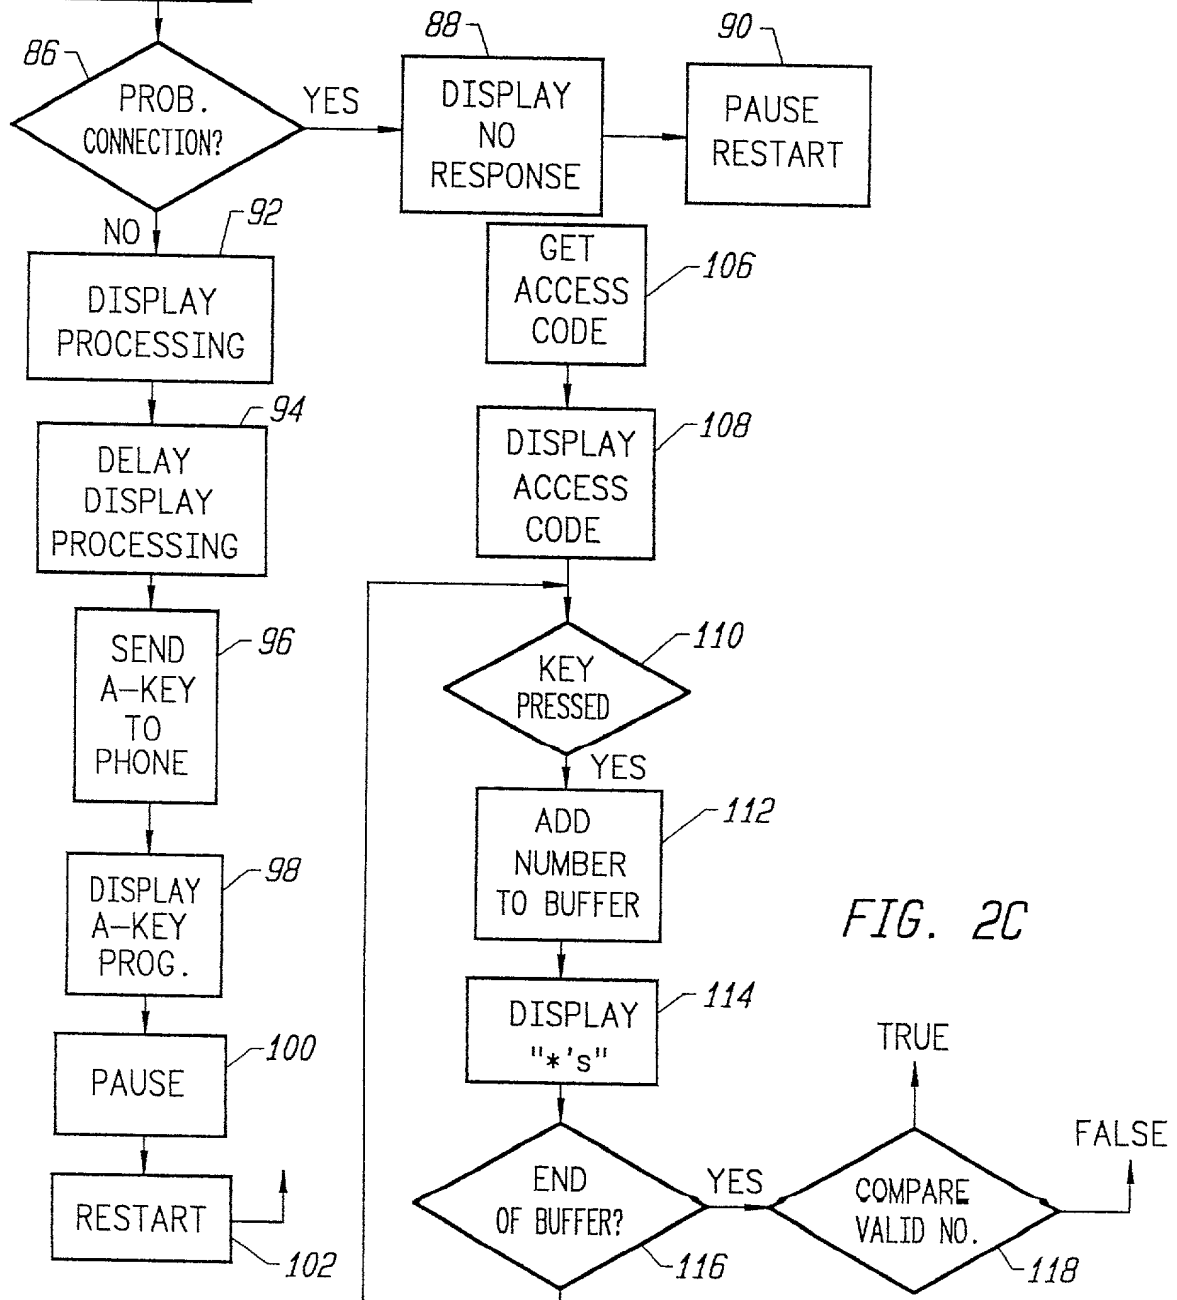


FIG. 2C

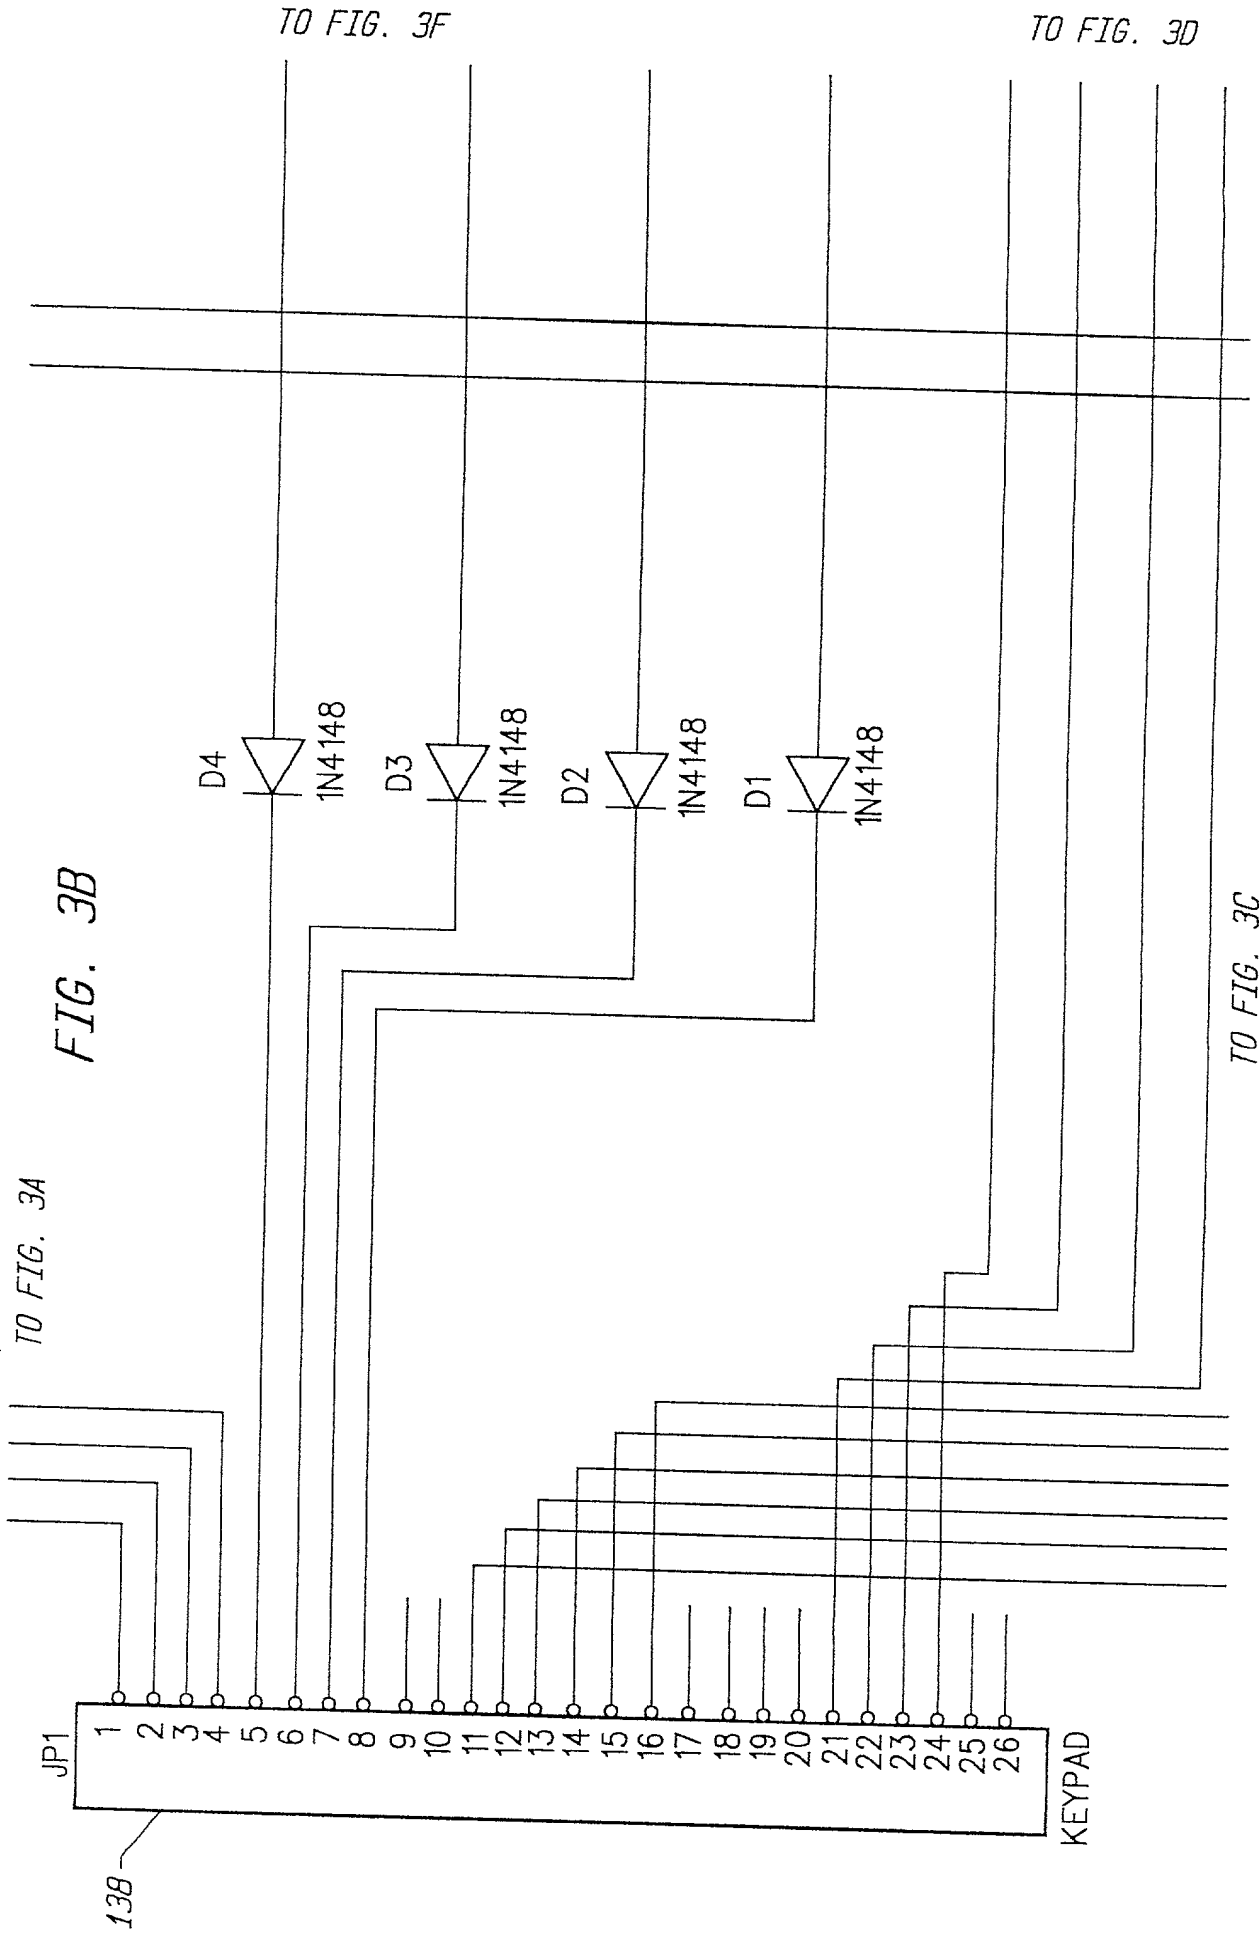


FIG. 3B

TO FIG. 3A

TO FIG. 3F

TO FIG. 3D

TO FIG. 3C

JP1


138

KEYPAD


FIG. 3C

TO FIG. 3B

TO FIG. 3B

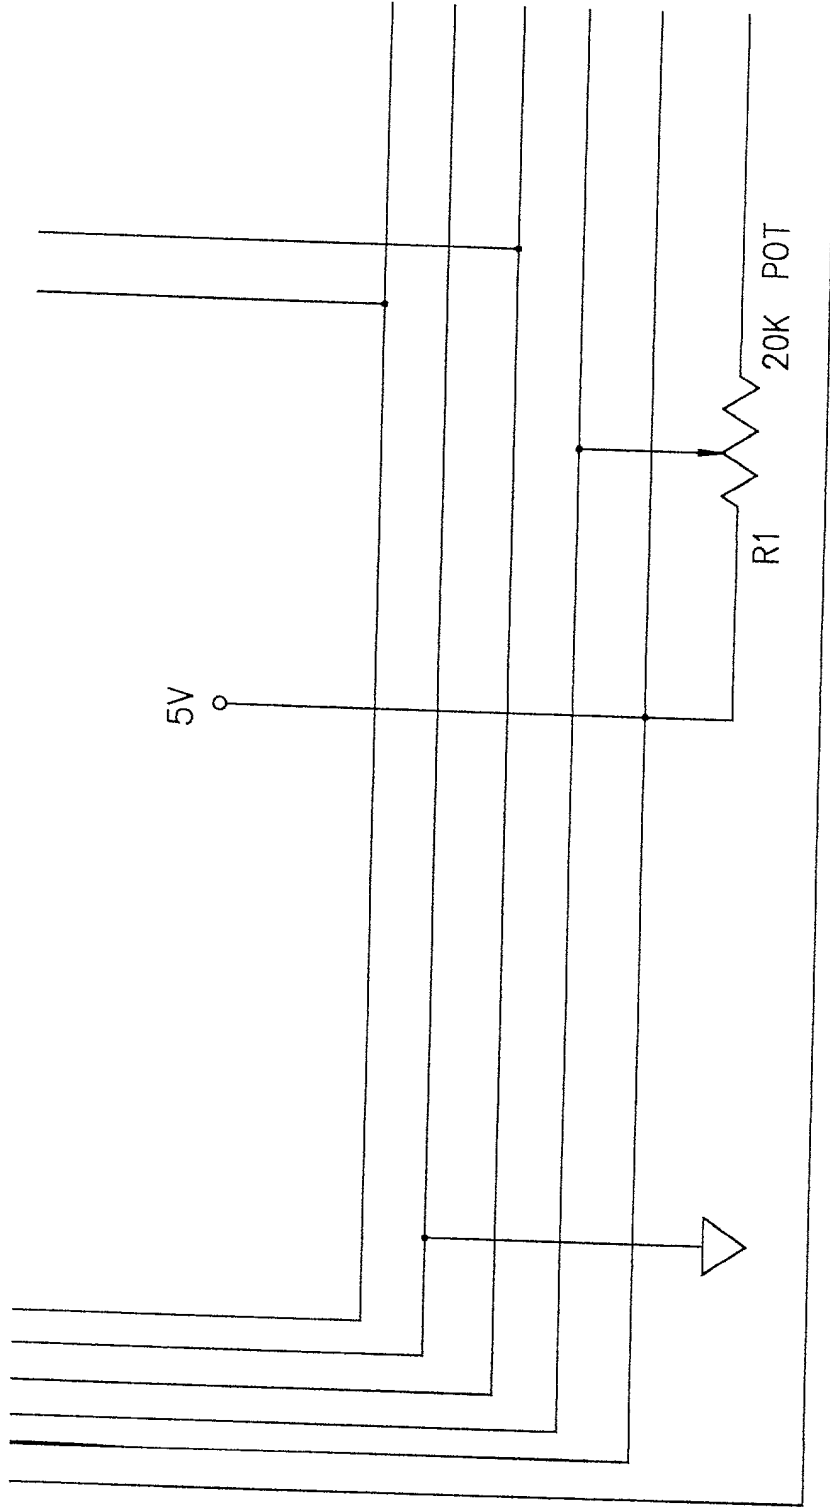

TO FIG. 3D

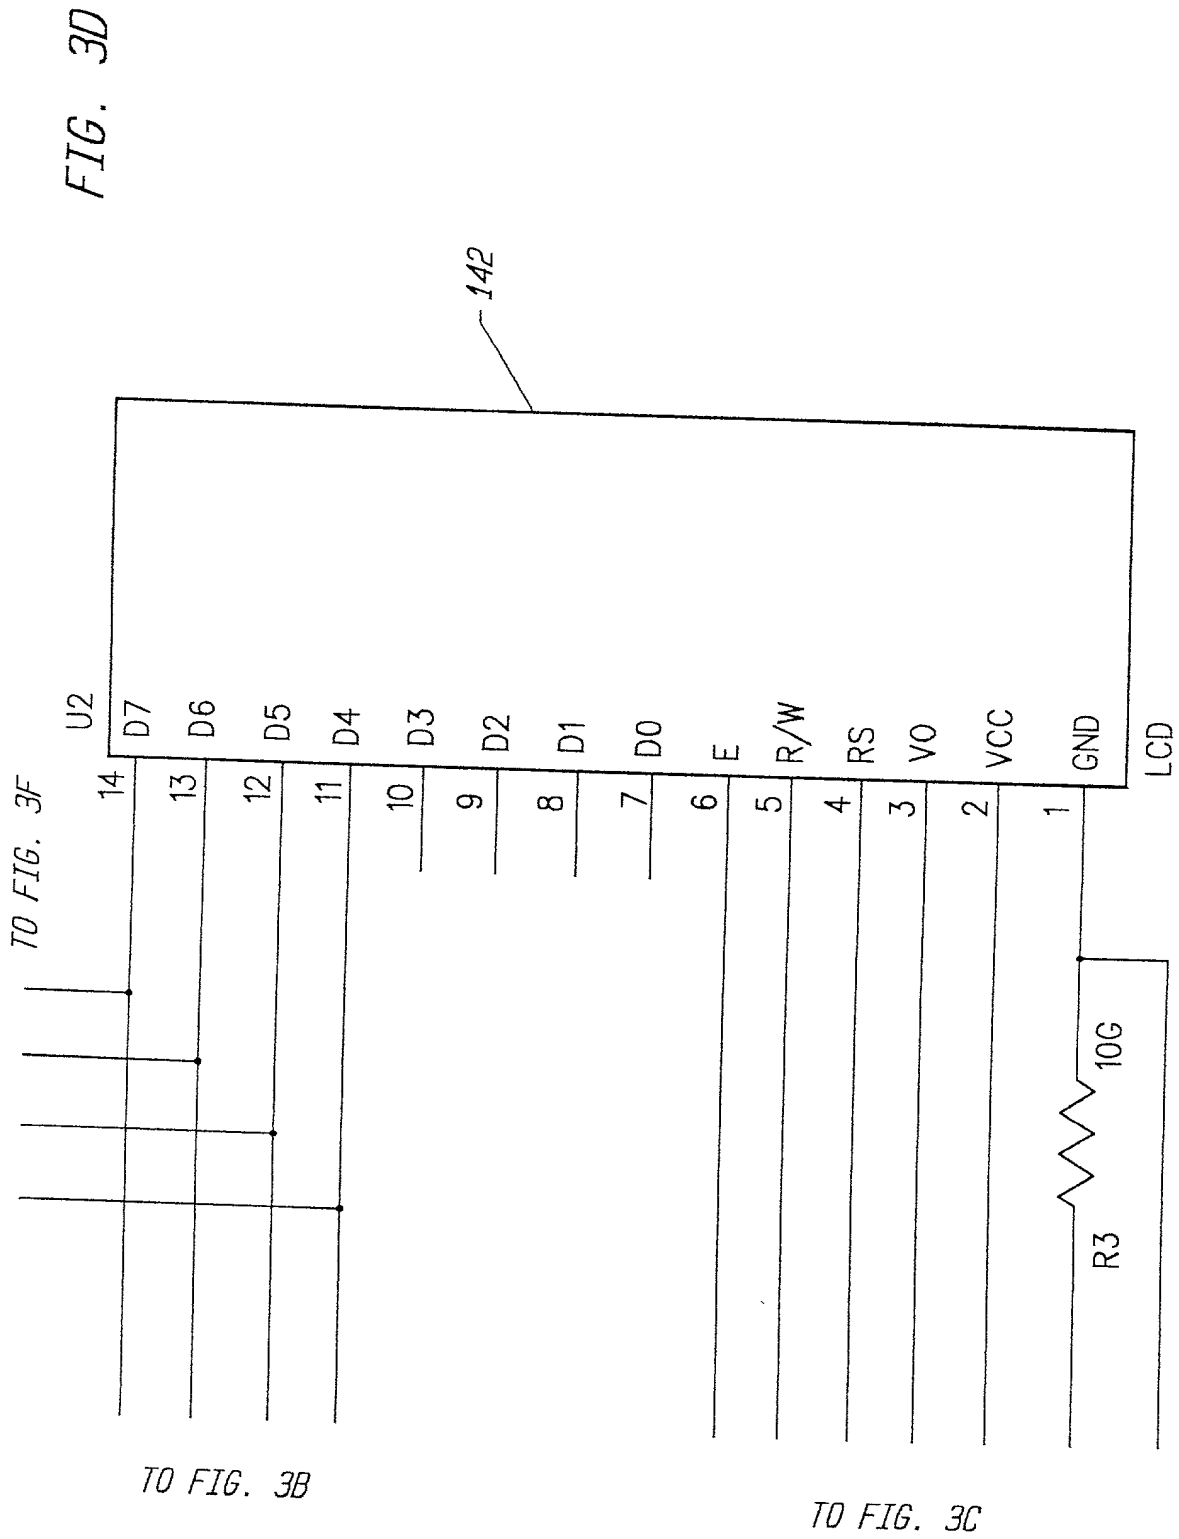


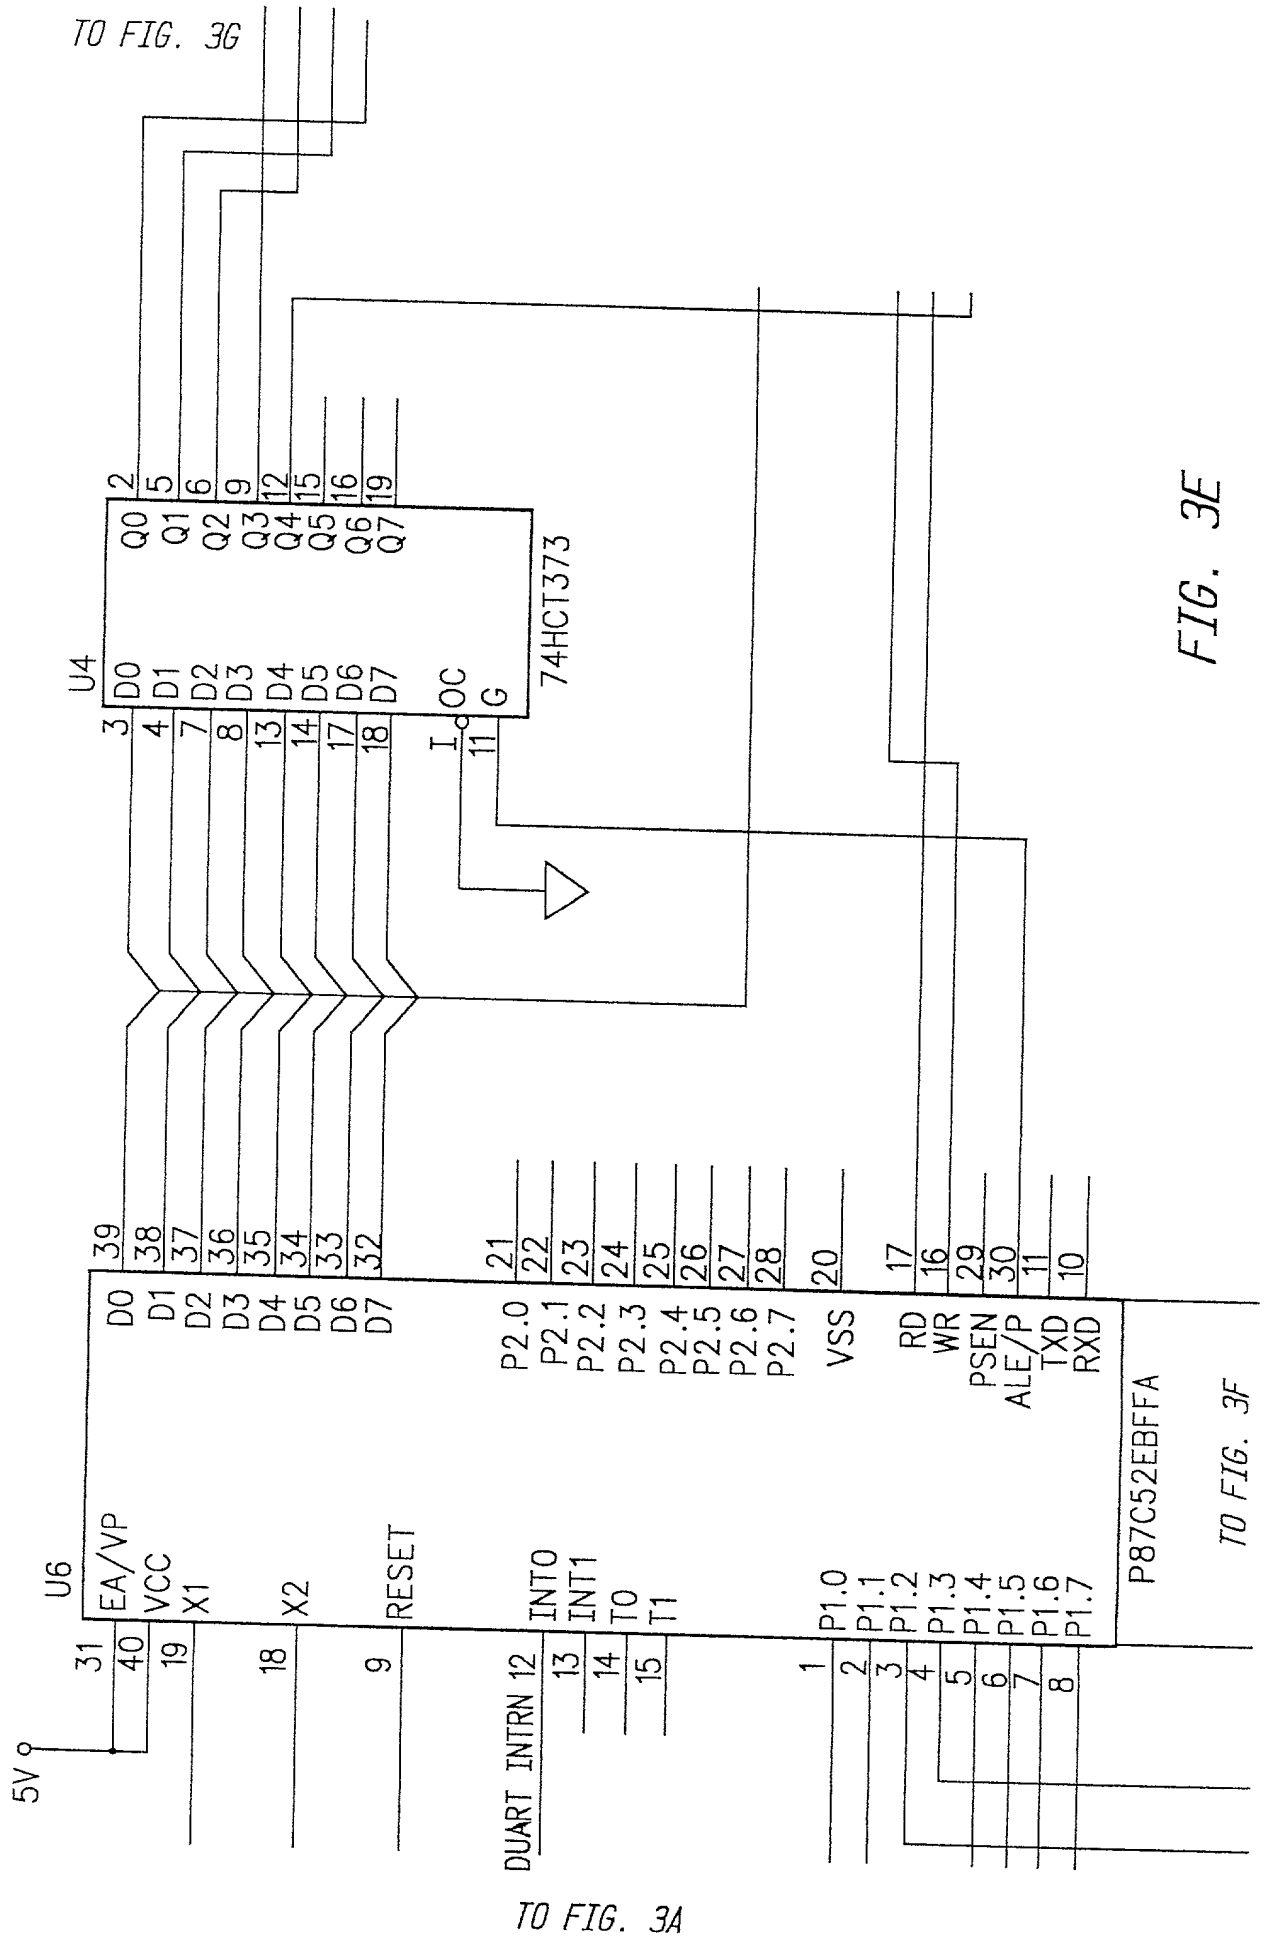


FIG. 3F

TO FIG. 3A


TO FIG. 3E

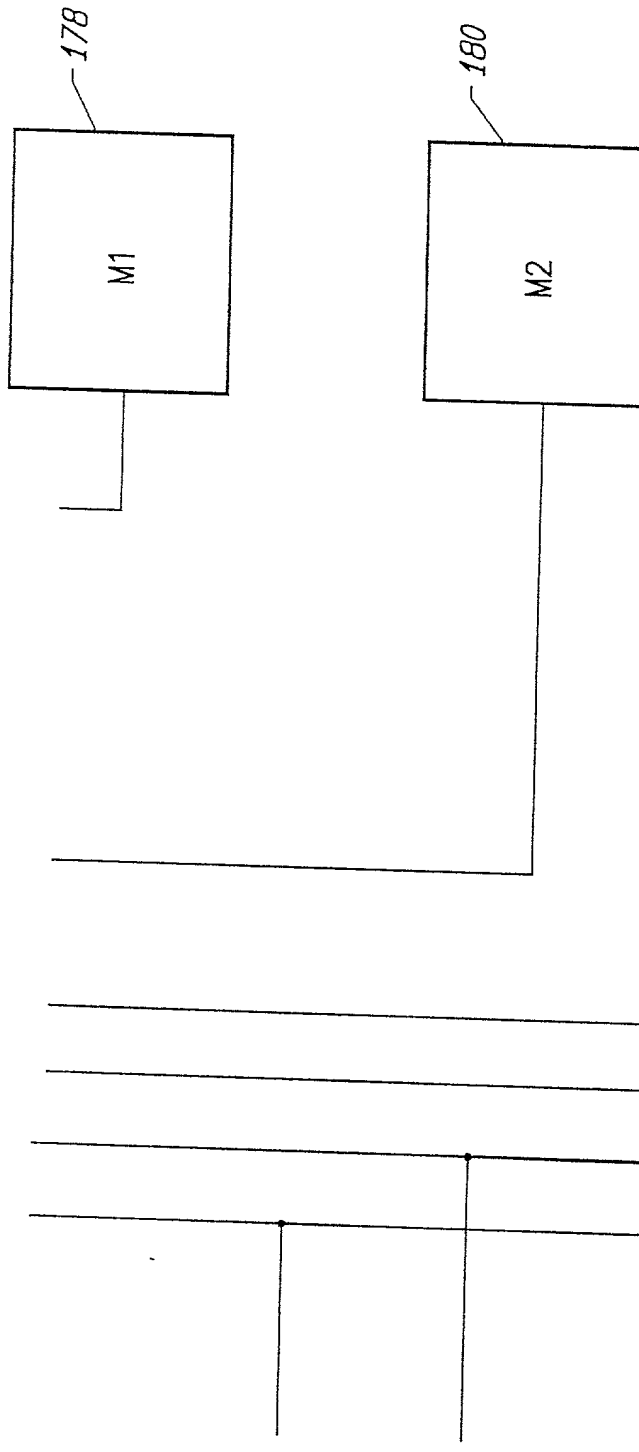

TO FIG. 3B

TO FIG. 3D

FIG. 4

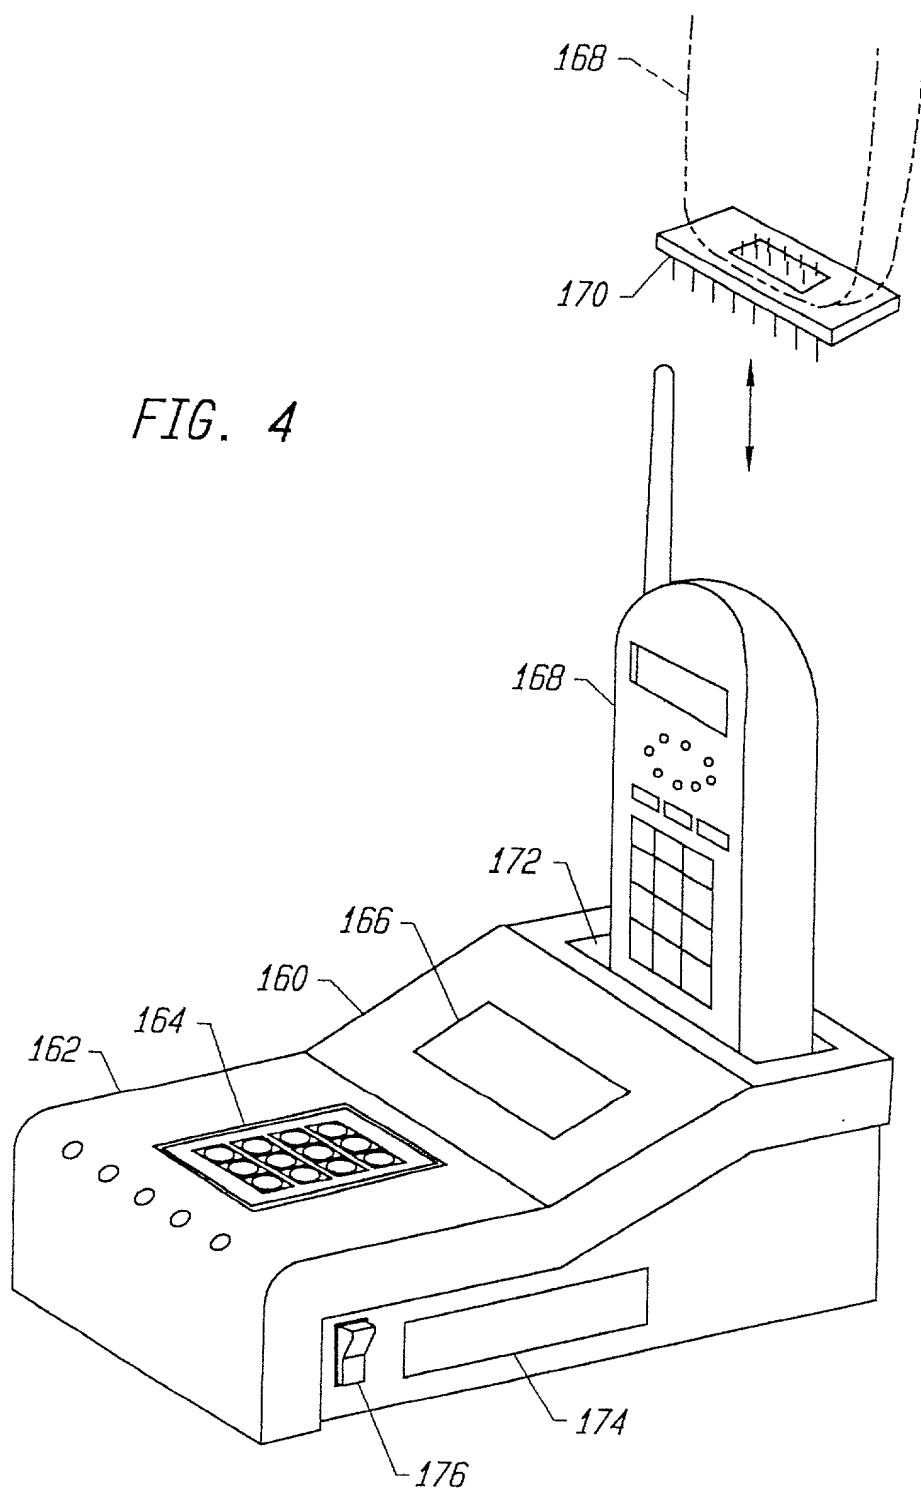

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	13023(B)
	First Named Inventor	WATLER, T.
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SECURE INTERLINK RECEIVER FOR REMOTE
PROGRAMMING OF WIRELESS TELEPHONES**

the specification of which

(Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
08/968,329	11/12/1997	6,138,004
08/521,966	08/31/1995	(abandoned)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☐ Customer Number OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Richard Esty Peterson	26,495		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label OR ☒ Correspondence address below

Name	Richard Esty Peterson				
Address	Patent Attorney				
Address	1905 - D Palmetto Avenue				
City	Pacifica	State	CA	ZIP	94044
Country	United States	Telephone	(650) 557-5708	Fax	(650) 557-5716

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname					
THEODORE W.		WATLER					
Inventor's Signature				Date			
Residence: City	Long Beach	State	CA	Country	United States	Citizenship	Yes
Post Office Address	5341 East 4th Street						
Post Office Address							
City	Long Beach	State	CA	ZIP	90814	Country	United States

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 3 of 3

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
TRAVIS MELCHIN				McGREGOR			
Inventor's Signature					Date		
Residence: City	Manhattan Beach	State	CA	Country	United States	Citizenship	Yes
Post Office Address		2704 Manhattan Beach Avenue					
Post Office Address							
City	Manhattan Beach	State	CA	ZIP	90266	Country	United States
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
DONALD SCOTT				McGREGOR			
Inventor's Signature					Date		
Residence: City	Spokane	State	WA	Country	United States	Citizenship	Yes
Post Office Address		12931 S. Fairway Ridge Lane					
Post Office Address							
City	Spokane	State	WA	ZIP	99224	Country	United States
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
CHRISTOPHER M.				McGREGOR			
Inventor's Signature					Date		
Residence: City	Sunnyvale	State	CA	Country	United States	Citizenship	Yes
Post Office Address		1247 Lakeside Drive, Apt. 3035					
Post Office Address							
City	Sunnyvale	State	CA	ZIP	94086	Country	United States

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

POWER OF ATTORNEY

I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

RICHARD ESTY PETERSON, Registration No. 26,495

Direct all calls to: Richard Esty Peterson

Telephone No: (650) 557-5708


Correspondence Address: RICHARD ESTY PETERSON
PATENT ATTORNEY
1905-D Palmetto Avenue
Pacifica, CA 94044

Assignee: TELEMAT CORPORATION, a Delaware Corporation, having its principal offices at 6701 Center Drive West, Suite 700, Los Angeles, California, 90045.

Date:

10/20/2000

By:


Val Dietrich, Director of Legal Affairs
Telemac Corporation